


3D Scanning Sensor Unit

ZSC-I User's Manual

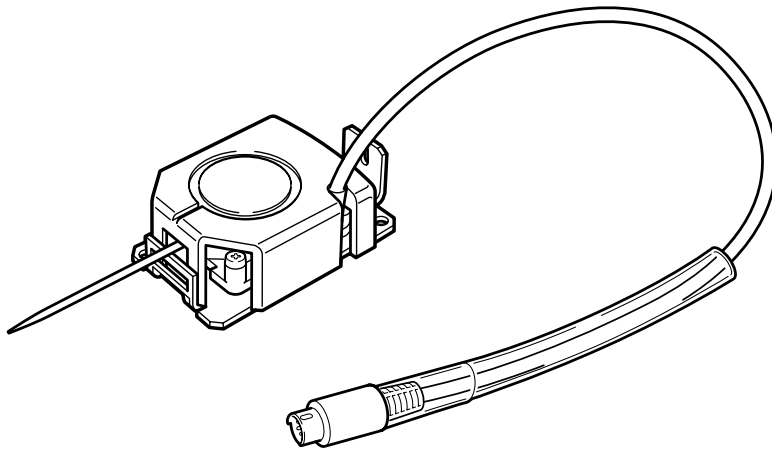

Thank you very much for purchasing this product.

- To ensure correct and safe usage with a full understanding of this product's performance, please be sure to read through this manual completely and store it in a safe location.
- Unauthorized copying or transferral, in whole or in part, of this manual is prohibited.
- The contents of this operation manual and the specifications of this product are subject to change without notice.
- The operation manual and the product have been prepared and tested as much as possible. If you find any misprint or error, please inform us.
- Roland DG Corp. assumes no responsibility for any direct or indirect loss or damage which may occur through use of this product, regardless of any failure to perform on the part of this product.
- Roland DG Corp. assumes no responsibility for any direct or indirect loss or damage which may occur with respect to any article made using this product.

Please read this agreement before opening the sealed disk package

Opening the sealed disk package implies your acceptance of the terms and conditions of this agreement.

Roland License Agreement

Roland DG Corporation ("Roland") grants you a non-assignable and non-exclusive right to use the COMPUTER PROGRAMS in the disk package ("Software") under this agreement with the following terms and conditions.

1. Coming into Force

This agreement comes into force when you purchase and open the sealed disk package. The effective date of this agreement is the date when you open the sealed disk package.

2. Property

Copyright and property of this Software, logo, name, manual and all literature for this Software belong to Roland and its licensor. The followings are prohibited:

Unauthorized copying the Software or any of its support file, program module or literature.

Reverse engineering, disassembling, decompiling or any other attempt to discover the source code of the Software.

3. Bounds of License

Roland does not grant you to sub-license, rent, assign or transfer the right granted under this agreement nor the Software itself (including the accompanying items) to any third party.

You may not provide use of the Software through time-sharing service and/or network system to any third party who is not individually licensed to use this Software.

You may use the Software by one person with using a single computer in which the Software is installed.

4. Reproduction

You may make one copy of the Software only for back-up purpose. The property of the copied Software belongs to Roland.

You may install the Software into the hard disk of a single computer.

5. Cancellation

Roland retains the right to terminate this agreement without notice immediately when any of followings occurs:

When you violate any article of this agreement.

When you make any serious breach of faith regarding this agreement.

6. Limitations on Liability



Roland may change the specifications of this Software or its material without notice.

Roland shall not be liable for any damage that may caused by the use of the Software or by exercise of the right licensed by this agreement.

7. Governing Law

This agreement is governed by the laws of Japan, and the parties shall submit to the exclusive jurisdiction of the Japanese Court.

Contents

 To Ensure Safe Use	2
 Pour utiliser en toute sécurité	4
Important Notes on Handling and Use	6
Chapter 1 Preparing the Sensor Unit	7
1-1 3D Scanning Sensor Unit	8
Supported Models	8
Unit Features	8
Checking the Included Items	8
Part Names and Functions	9
1-2 Installing the Sensor Unit	10
Installing the Sensor Unit	10
To Reinstall the Spindle Unit	11
1-3 Preparing the Programs	12
System Requirements for the Programs	12
System Requirements for USB Connection	12
Step 1: Installing and Setting Up the Programs	12
Step 2: Making the Settings for Dr. PICZA3	14
Chapter 2 Use and Operation As a 3D Scanner	15
2-1 Operation As a 3D Scanner	16
Operation As a 3D Scanner	16
Objects That Can and Cannot Be Scanned	17
Mounting the Object to Scan	18
2-2 Using the Included Programs	19
User's Manuals for the Programs	19
Amount of Computer Memory Required	20
Chapter 3 Basic Scanning Operation	21
3-1 Learning the Basics of Scanning	22
Step 1: Setting the Scanning Conditions	22
Step 2: Checking the Scanning Results	24
Step 3: Saving and Exporting Data	24
Chapter 4 Appendix	25
4-1 What to Do If...	26
The machine doesn't start	26
Scanning is impossible	26
Other Symptoms	26
4-2 Specifications	27
Scanning-mode Specifications	27



Windows® and Windows NT® are registered trademarks or trademarks of Microsoft® Corporation in the United States and/or other countries.
Pentium is a registered trademark of Intel Corporation in the United States.
Other company names and product names are trademarks or registered trademarks of their respective holders.

To Ensure Safe Use







Improper handling or operation of this machine may result in injury or damage to property. Points which must be observed to prevent such injury or damage are described as follows.

*Please also read the important safety information in the user's manual for the modeling machine.

About WARNING and CAUTION Notices

 WARNING	Used for instructions intended to alert the user to the risk of death or severe injury should the unit be used improperly.
 CAUTION	Used for instructions intended to alert the user to the risk of injury or material damage should the unit be used improperly. * Material damage refers to damage or other adverse effects caused with respect to the home and all its furnishings, as well to domestic animals or pets.

About the Symbols

	The  symbol alerts the user to important instructions or warnings. The specific meaning of the symbol is determined by the design contained within the triangle. The symbol at left means "danger of electrocution."
	The  symbol alerts the user to items that must never be carried out (are forbidden). The specific thing that must not be done is indicated by the design contained within the circle. The symbol at left means the unit must never be disassembled.
	The  symbol alerts the user to things that must be carried out. The specific thing that must be done is indicated by the design contained within the circle. The symbol at left means the power-cord plug must be unplugged from the outlet.

 **Incorrect operation may cause injury**

 **WARNING**



Be sure to follow the operation procedures described in this manual.

Failure to follow the procedures may cause sudden operation or the like of the machine, which may result in unexpected injury.



Never allow anyone unfamiliar with the usage or handling of the machine to touch the machine.

Touching a dangerous location may cause sudden operation or the like of the machine, which may lead to an unexpected accident.



Never allow children near the machine.

The machine includes locations and components that pose a danger to children, and major accident, including injury, blindness, or choking, may occur.



Never touch the tip of the probe. Also, be sure to attach the probe cover when the sensor unit is not in use.

The tip of the probe is very sharp, and can cause injury or blindness.



Do not disassemble, repair, or modify.

Doing so may lead to fire or abnormal operation resulting in injury.

 **Important Notes on Scanning**

 **CAUTION**



Never attempt to scan any object of high intrinsic or personal value, or that would otherwise be difficult to replace if damaged or broken.

Because scanning involves contact by the probe, the object scanned may be damaged. Incorrect settings may also cause the scanned object to strike areas other than the probe. Scan-object damage is not covered by warranty.



When loading an object to scan, make sure that all sides and the top of the object are within the scannable area.

A scanned object may strike a component other than the probe and suffer damage. Scan-object damage is not covered by warranty.



Be sure to remove the probe cover when performing scanning.

Otherwise the object scanned may strike the probe cover and suffer damage. Scan-object damage is not covered by warranty.





Pour utiliser en toute sécurité




La manipulation ou l'utilisation inadéquates de cet appareil peuvent causer des blessures ou des dommages matériels. Les précautions à prendre pour prévenir les blessures ou les dommages sont décrites ci-dessous.

* Lire sans faute les importants renseignements sur la sécurité dans le guide de l'utilisateur de la machine à modeler.

Avis sur les avertissements






 ATTENTION	Utilisé pour avertir l'utilisateur d'un risque de décès ou de blessure grave en cas de mauvaise utilisation de l'appareil.
 PRUDENCE	Utilisé pour avertir l'utilisateur d'un risque de blessure ou de dommage matériel en cas de mauvaise utilisation de l'appareil. * Par dommage matériel, il est entendu dommage ou tout autre effet indésirable sur la maison, tous les meubles et même les animaux domestiques.

À propos des symboles

	Le symbole \triangle attire l'attention de l'utilisateur sur les instructions importantes ou les avertissements. Le sens précis du symbole est déterminé par le dessin à l'intérieur du triangle. Le symbole à gauche signifie "danger d'électrocution".
	Le symbole \ominus avertit l'utilisateur de ce qu'il ne doit pas faire, ce qui est interdit. La chose spécifique à ne pas faire est indiquée par le dessin à l'intérieur du cercle. Le symbole à gauche signifie que l'appareil ne doit jamais être démonté.
	Le symbole \bullet prévient l'utilisateur sur ce qu'il doit faire. La chose spécifique à faire est indiquée par le dessin à l'intérieur du cercle. Le symbole à gauche signifie que le fil électrique doit être débranché de la prise.




L'utilisation incorrecte peut causer des blessures

ATTENTION

-  **S'assurer de suivre les procédures d'utilisation décrites dans ce manuel.**
Si les procédures indiquées ne sont pas suivies, le fonctionnement de l'appareil peut être déclenché soudainement, ce qui risque de causer des blessures.
-  **Ne jamais permettre à quiconque de toucher l'appareil s'il ou si elle n'en connaît pas le fonctionnement ou la manutention.**
Toucher l'appareil à certains points dangereux peut en déclencher le fonctionnement, ce qui risque de causer un accident imprévu.
-  **Ne jamais laisser d'enfants s'approcher de l'appareil.**
Des éléments et des surfaces de l'appareil présentent des risques pour les enfants. Il pourrait se produire un accident grave qui causerait des blessures, ou créerait un risque de cécité ou de suffocation.
-  **Ne jamais toucher l'extrémité de la sonde. S'assurer de fixer le couvert de la sonde lorsque le capteur n'est pas utilisé.**
L'extrémité de la sonde est très acérée et peut causer des blessures ou la cécité.
-  **Ne pas démonter, réparer ni modifier.**
Démonter, réparer ou modifier l'appareil risque de provoquer un incendie ou de causer un fonctionnement anormal entraînant des blessures.

Remarque importante sur la numérisation (scanning)

PRUDENCE

-  **Ne jamais tenter de numériser un objet de grande valeur monétaire ou sentimentale, ou un objet qui serait difficile à remplacer s'il était endommagé ou brisé.**
Les objets numérisés risquent d'être endommagés parce que la numérisation exige un contact entre la sonde et l'objet. En outre, si les réglages sont erronés, l'objet numérisé peut frapper des points autres que la sonde. La garantie ne couvre pas les objets numérisés.
-  **Pendant le chargement d'un objet à numériser, s'assurer que tous les côtés et la partie supérieure de l'objet sont à l'intérieur de la surface numérisable.**
Un objet numérisé peut frapper une composante autre que la sonde et être endommagé. La garantie ne couvre pas les objets numérisés.
-  **S'assurer de retirer le couvert de la sonde pour faire la numérisation.**
Sinon, l'objet numérisé peut frapper une composante autre que la sonde et être endommagé. La garantie ne couvre pas les objets numérisés.

Important Notes on Handling and Use

This unit is a precision device. To ensure the full performance of this unit, be sure to observe the following important points. Failure to observe these may not only result in loss of performance, but may also cause malfunction or breakdown.

This Unit Is a Precision Device

- Never drop or subject to impact.
- Never twist or wrench the probe by hand.
- When not using the sensor unit, attach the probe cover and store in a safe place.

Items That may Not Be Copied

Unauthorized reproduction of a copyrighted item for any purpose other than personal use may be a violation of copyright.

Roland DG Corp. will not be responsible for any violation of third-party copyright by any article made through use of this product.

Chapter 1

Preparing the Sensor Unit

I-I 3D Scanning Sensor Unit


Supported Models

- Roland DG MDX-40
- Techsoft TS-30

Unit Features

This is an optional unit that enables you to use any of the preceding compatible models of modeling machines as a 3D scanner. Replacing the spindle unit with the sensor unit adds contacting 3D-scanner functionality. Dedicated programs for 3D scanning and for editing 3D data are included.


Checking the Included Items




Sensor unit



Cap screws (black)




Hexagonal wrench (3 mm)*



Clay



Roland Software Package
CD-ROM




User's Manual (this manual)

* A 2.5-mm hexagonal wrench is included with the modeling machine.

Part Names and Functions

Probe cover

This cover protects the probe. When not using the sensor unit, be sure to attach the probe cover.

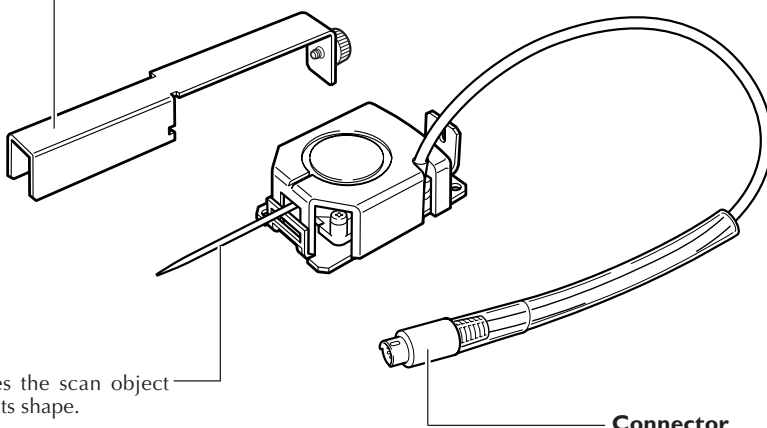

Probe

This touches the scan object and senses its shape.

Connector

This is the connector for connection to the modeling machine.

I-2 Installing the Sensor Unit

Installing the Sensor Unit

⚠ CAUTION Before you carry out this operation, switch off the power to the modeling machine.

Failing to do so may result in sudden movement of the machine, causing the hands or fingers to become caught and resulting in injury.

⚠ CAUTION Do not touch the spindle motor immediately or cutter after a cutting operation has ended.


Doing so may result in burns.

⚠ CAUTION Perform installation and removal of the sensor unit while the cover is attached.


Otherwise the probe may stab the hand or fingers and cause injury.

Before you install the sensor unit, complete the setup operations for the modeling machine. For information on how to perform setup, refer to the documentation included with the modeling machine.


Procedure

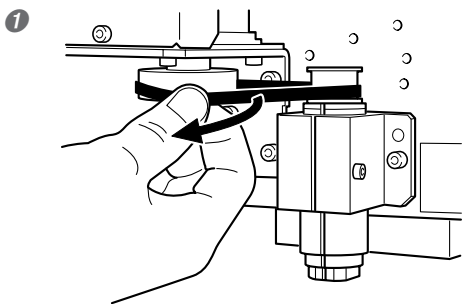


- ① Switch off the power to the modeling machine and unplug its power cord. If a tool is installed, then remove it.
- ② Remove the belt.

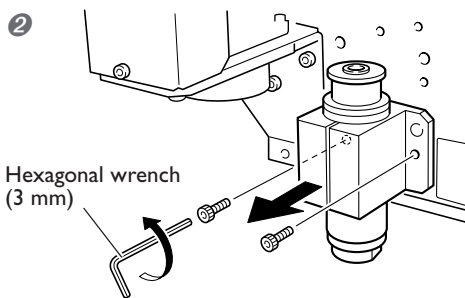


- ① Remove the cap screw shown in the figure.
- ② Remove the spindle unit.

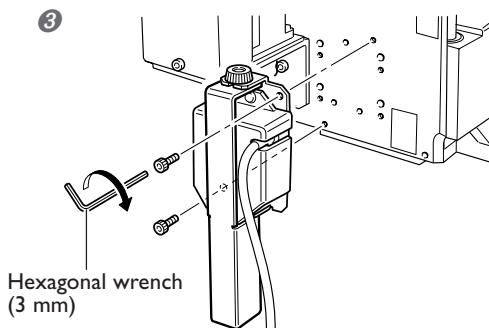


Install the sensor unit, using black cap screws.

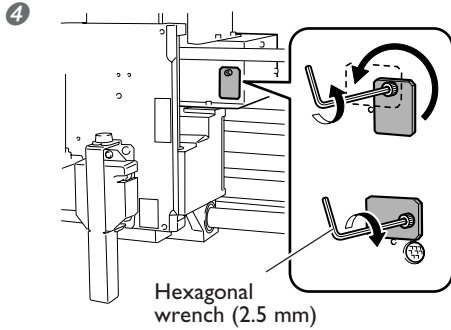

- ① Slightly loosen the cap screw shown in the figure.
- ② Turn the connector cover to open it.
- ③ Retighten the cap screw.

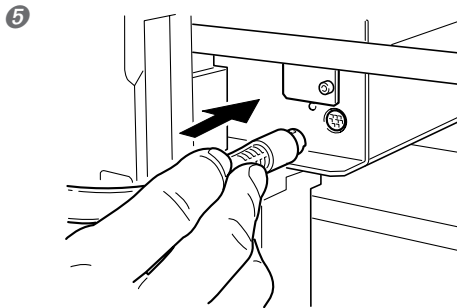

Insert the cable for the sensor unit into the connector.

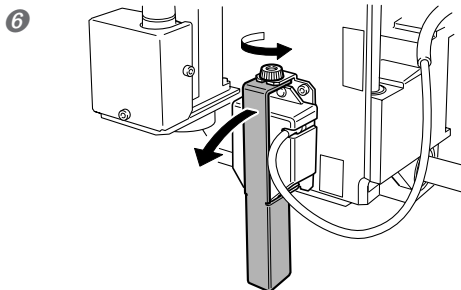

Detach the probe cover.

⚠ CAUTION


Be sure to remove the probe cover when performing scanning.

Otherwise the object scanned may strike the probe cover and suffer damage. Scan-object damage is not covered by warranty.

Carefully store the removed spindle unit, belt, cap screw, and probe cover so that they do not become misplaced.

To Reinstall the Spindle Unit

- Switch off the power to the modeling machine, then carry out installation by following the foregoing procedure in reverse.
- The belt has an inner side and an outer side. Be sure the two sides are oriented correctly.
- After attaching the belt, turn the pulley by hand several times to acclimatize the belt.



The white mark indicates the outer side.

I-3 Preparing the Programs

System Requirements for the Programs

Operating system:	Windows 98 SE (Second Edition)/Me/2000/XP
CPU:	Pentium 4 processor or better recommended
Memory:	512 MB or more recommended
Free hard-disk space required for installation:	Dr. PICZA3: 20 MB or more, 3D Editor: 10 MB or more
Display:	800 x 600 resolution and 16 bit colors (High Color) or more recommended. OpenGL-compatible accelerator board recommended.

- The Windows-based driver for the modeling machine must already be installed and the computer and modeling machine must be connected by a USB cable.
- Memory requirement are affected by scanning conditions and the like. Larger scanning areas and finer scanning pitches require increasingly more memory. We recommend installing enough memory to match your usage conditions.

System Requirements for USB Connection

Making a USB connection with Windows requires use of a computer that meets all of the following system requirements. Please note that other configurations cannot be supported.

Operating system:	Windows 98 SE/Me/2000/XP
Computer:	1) Computers preinstalled with Windows 98 SE/Me/2000/XP at the time of purchase (This includes such computers later upgraded to Windows Me/2000/XP.) 2) Computers on which USB operation is assured by the manufacturer of computers

- The ability to make a USB connection depends on the specifications of the computer. To determine whether the computer you're using is capable of correct USB operation, check with the manufacturer of the computer.
- Use a shielded USB cable having a length of 3 meters or less. Do not use a USB hub or the like.


Step I: Installing and Setting Up the Programs

Programs to Install and Set Up

- Dr. PICZA3: This program enables you to perform 3D scanning.
- 3D Editor: This program enables you to edit scanned 3D data.

Procedure


1




Install the Windows-based driver for the modeling machine and make the connection using a USB cable.

For more information, refer to the documentation included with the modeling machine. If the connection is already made, go on to procedure 2 below.


2 Roland Software Package




- ① If you're using Windows 2000/XP, log on to an "Administrators" account.
 - ② Insert the Roland Software Package CD-ROM into the computer's CD-ROM drive.
- After a short wait, the setup menu appears.

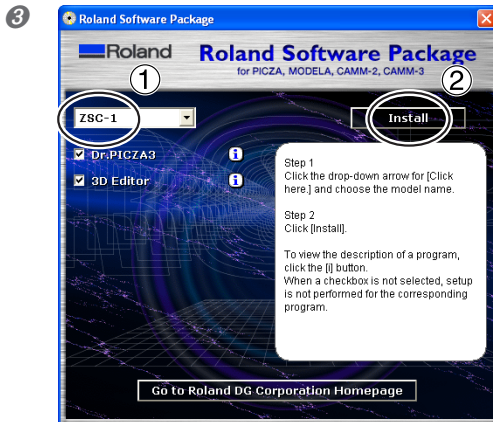

- ① Select [ZSC-1].
- ② Click [Install].

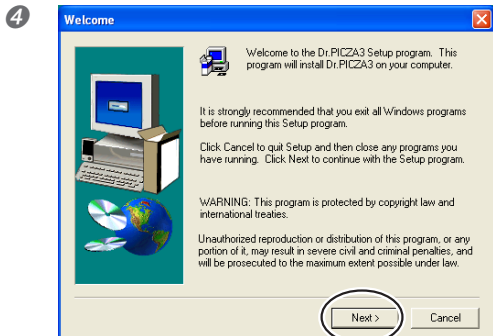

Click [Next], then follow the on-screen instructions to complete setup and installation.



When this window appears, click [Close]. This completes setup and installation of all the programs. Go on to Step 2.


Important Note about the Version of the CD-ROM

For the Roland Software Package CD-ROM (RSP-009), use either the version included with this unit, or a newer version. Versions of the CD-ROM earlier than 2.6D are not compatible with this unit.

Step 2: Making the Settings for Dr. PICZA3


Procedure

①



Turn on the power to the modeling machine.


②

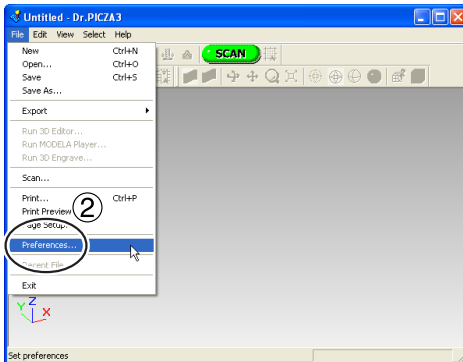

① From the [Start] menu, click [All Programs] - [Roland Dr. PICZA3] - [Dr. PICZA3].

② Go to the [File] menu and click [Preferences].

③

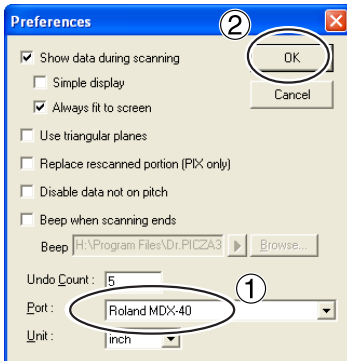

① For [Port], select the model name of the modeling machine you're using.

② Click [OK].

③ Go to the [File] menu and click [Exit] to quit Dr. PICZA3.

This completes the preparations for the program.

Checking the Connection

In Dr. PICZA3, go to the [Help] menu and display [About]. If the firmware version and model name are displayed, the connection is correct.

Chapter 2


Use and Operation As a 3D Scanner

2-1 Operation As a 3D Scanner

Operation As a 3D Scanner


Startup

1



Close the front cover.

2



Switch on the main power switch.
The POWER light comes on.

3



Press the Sub power button.
The machine starts up, and initialization is performed. After initialization ends, the SCANNING light and the VIEW light comes on and the machine is paused.

4



Press the VIEW button.
The view state is canceled, and the machine finishes preparations for performing scanning.

To Start Scanning

- Close the front cover and make the VIEW light go dark.
- During scanning, never open the front cover.
- You can pause scanning by pressing the VIEW button. Pressing the VIEW button a second time resumes operation.
- You can open the front cover while operation is paused.

Operation During the Scanning Mode

- The SCANNING light comes on when the machine is in the scanning mode.
- The machine automatically changes to the scanning mode when the sensor unit is installed and to the modeling mode when the spindle unit is installed.
- The operation of other buttons and controls is identical both in the scanning mode and in the modeling mode. Refer to the documentation included with the modeling machine.
- When in the scanning mode, the "operation-panel screen" cannot be used.

Objects That Can and Cannot Be Scanned

Objects Unsuitable for Scanning

Objects that change shape when touched by the probe cannot be scanned.


- For example, objects such as items made of soft rubber or fuzzy stuffed animals cannot be scanned.
- Depending on the configuration of the object, error equal to about the radius of the probe (0.5 mm) may occur.

⚠ CAUTION Never attempt to scan any object of high intrinsic or personal value, or that would otherwise be difficult to replace if damaged or broken.

Because scanning involves contact by the probe, the object scanned may be damaged. Incorrect settings may also cause the scanned object to strike areas other than the probe. Scan-object damage is not covered by warranty.

Scannable Area

The figure shows the scannable area.

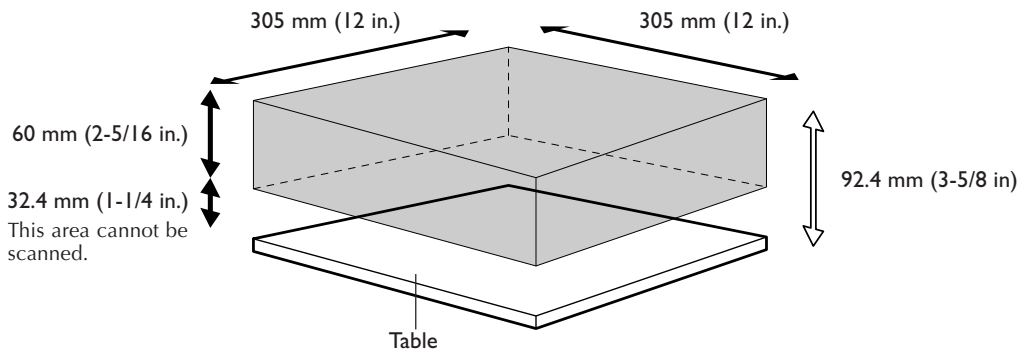

The size that can actually be scanned depends on the amount of memory in the computer. For more information, refer to page 20, "Amount of Computer Memory Required."

Mounting the Object to Scan


Mounting the Object to Scan

- Secure in place with the surface to scan facing up.
- Secure firmly to keep from moving during scanning.


⚠ CAUTION When loading an object to scan, make sure that all sides and the top of the object are within the scannable area.
A scanned object may strike a component other than the probe and suffer damage. Scan-object damage is not covered by warranty.

Various Methods for Securing in Place

- Double-sided adhesive tape can be useful for flat-bottomed object.

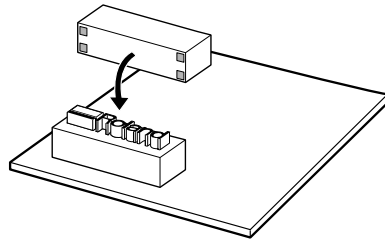


- When the bottom is uneven, it may be possible to secure the object by pressing it into a piece of clay.



To Scan a Small or Thin Object

If the portion you want to scan isn't positioned inside the scanning area, place a block or the like underneath it to elevate it.

However, be sure to keep its height at 92.4 mm (3-5/8 in.) or less from the table surface.

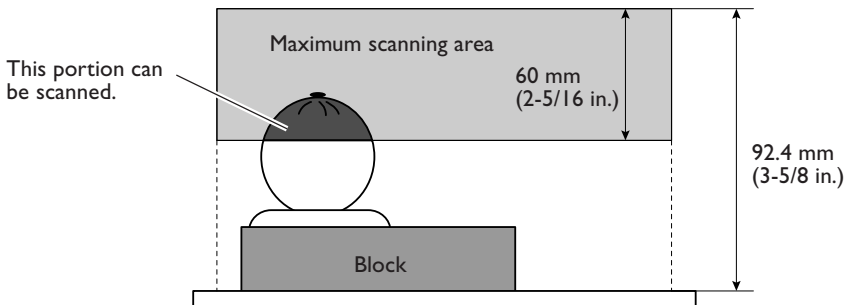

2-2 Using the Included Programs


User's Manuals for the Programs

Description of Basic Operation

☞ See page 21, "Chapter 3 Basic Scanning Operation"


Detailed Description

You can find detailed explanations of the programs in the online help (electronic-format manuals).

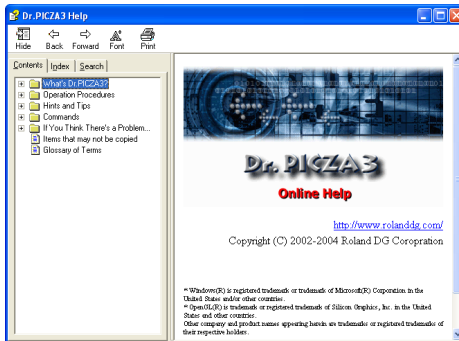

Dr. PICZA3

From the [Start] menu, click [All Programs] - [Roland Dr. PICZA3] - [Dr. PICZA3 Help].

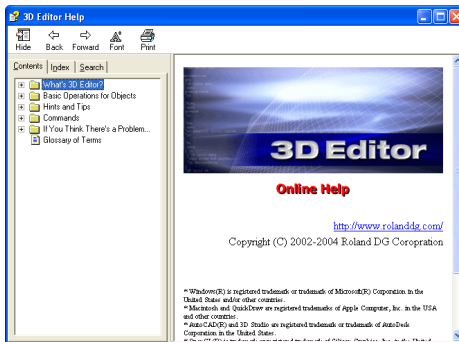

3D Editor

From the [Start] menu, click [All Programs] - [Roland 3D Editor] - [3D Editor Help].

The Machine's Scanning Mode

This machine has only a single scanning mode. It does not support such scanning methods as rotary, plane, line, or point scanning.

Data exported using the "Polylines" command is not supported.

Amount of Computer Memory Required

Important Note about Required Memory

The amount of memory required increases proportionally as the dimensions of the scanning area grow larger or as the scanning pitch is made finer. Insufficient memory can slow down the operation of the computer, and even make it appear to freeze.

Estimating the Memory Requirements

Use the following information as a guide to estimate the amount of memory that Dr. PICZA3 requires. (These figures do not include memory required by the operating system itself.)

Scanning area (width x depth)	Scanning pitch	Required memory
100 x 100 mm	0.05 x 0.05 mm	Approx. 2 GB
100 x 100 mm	0.1 x 0.1 mm	Approx. 500 MB
100 x 100 mm	0.5 x 0.5 mm	Approx. 20 MB

Chapter 3

Basic Scanning Opera- tion

3-1 Learning the Basics of Scanning


Step 1: Setting the Scanning Conditions

Let's start actually scanning something.

You mount the object to be scanned, start the 3D scanner, then use the 3D-scanning program to begin scanning.


Procedure

- 1 Start Dr. PICZA3 and display the [Settings for Scanning] dialog box.

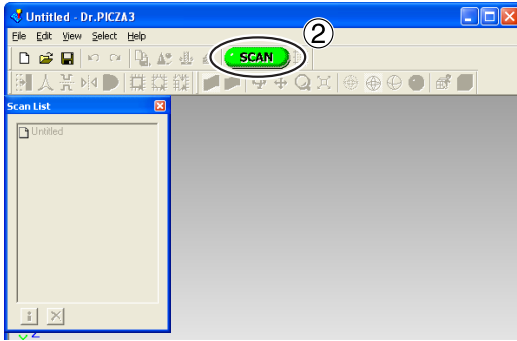

- 1 From the [Start] menu, click [All Programs] - [Roland Dr. PICZA3] - [Dr. PICZA3].
- 2 Click [Scan].

- 2 Make the settings for the area to scan (width and depth).

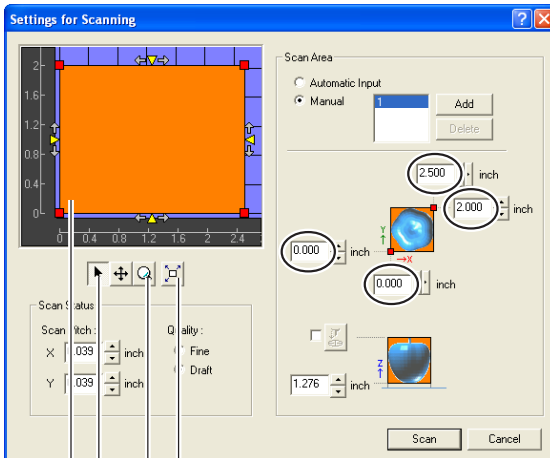


Type in the lower-left and upper-right locations of the scanning area.

- Clicking this returns to the original view.
- This enlarges (zooms) the displayed view. Click this, then drag to enclose the area you want to enlarge.
- Click this to set or verify the scanning area.
- The orange quadrilateral indicates the area to scan (width and depth).
- Double-clicking a red square moves the probe to that location. You use this to verify the scanning area.
- You can make the settings for the scanning area by dragging the red squares.

It's a good idea to reduce the area to the smallest size necessary. Making the area larger than necessary increases the scanning time and uses up excess memory.

- 3 Make the settings for the area to scan (height direction).

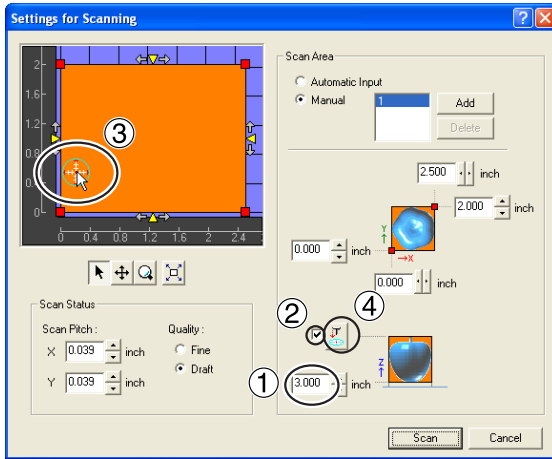


- 1 Enter the lower limit of the scanning area (the distance of the location from the table surface).
- 2 Click this check box to select it.
- 3 Find the highest location on the scan object. Then drag this marker to that location.
- 4 Click this button.

- The probe moves and touches the highest location of the scan object. (The area above this is not scanned.)
- If the location touched is not the highest, then redo 3 and 4. If it is difficult to guide the probe to the location you want, it may be useful to place a thick piece of paper or the like on top of the scan object, then make the probe touch the surface of the paper.
- Omitting this setting causes the entire scannable area to be scanned from top to bottom.

It's a good idea to reduce the area to the smallest size necessary. Making the area larger than necessary increases the scanning time and uses up excess memory.

- 4 Set the scanning pitch, then start scanning.

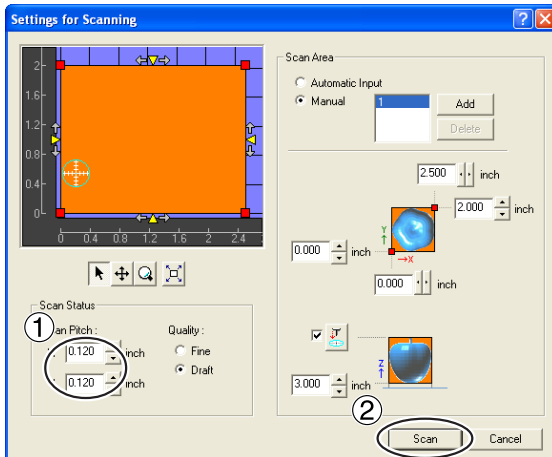


- 1 Enter the scanning pitch.
- 2 Click [Scan].

Be careful not to make the scanning pitch too small. Smaller settings for the scanning pitch permit scanning with correspondingly greater detail, but also use up correspondingly larger amounts of memory.

Step 2: Checking the Scanning Results

You can preview the results while dragging the object to change its orientation and positioning.

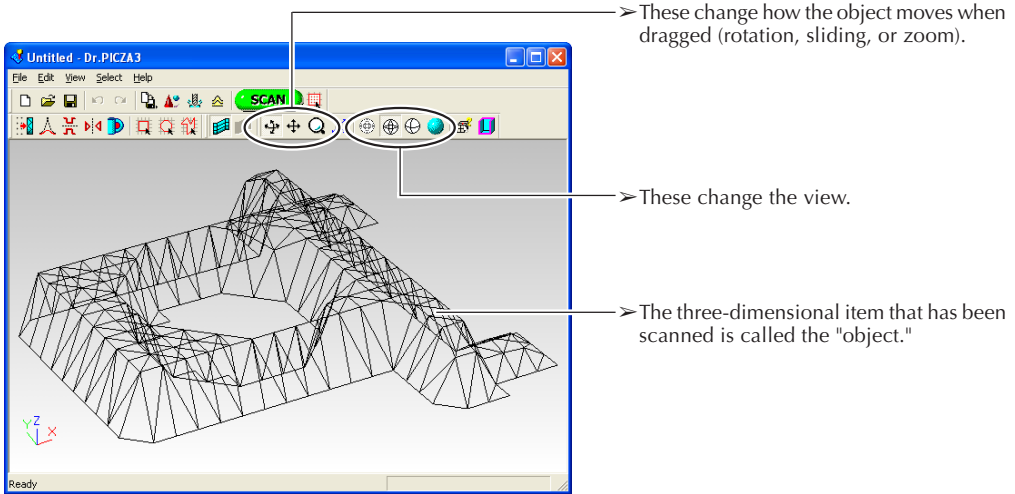

Step 3: Saving and Exporting Data

If the results are acceptable, then save the data. You can also save (export) data converted to a format that other programs can import.

Save

Go to the [File] menu and click [Save As].

- Data saved using this method can be opened in Dr. PICZA3 and 3D Editor.
- Once you have saved this data, you can export it in a variety of different formats.

Export

Go to the [File] menu and click [Export].

- 3D Editor also has an export feature. It lets you export data in a wider variety of formats than Dr. PICZA3.

Chapter 4

Appendix

4-1 What to Do If...

The machine doesn't start

The VIEW light is flashing.

The sub power button was pressed while the front cover was open, or the front cover was opened just after the sub power button was pressed. Close the front cover and switch the power off. Keep the front cover closed until startup finishes.

The SCANNING light flashes every 0.5 second.

The front cover was opened before startup finished. Close the front cover and switch the power off. Keep the front cover closed until startup finishes.

The SCANNING light flashes every 0.1 second.

Something touched the sensor during initial operation immediately after switching on the power, or a hardware error occurred.

If there is an obstruction, then switch off the power, remove the obstruction, and switch the power back on. If there was a hardware error, then switch the power off and back on and repeat the same operation. If the same error display occurs, consult your authorized Roland dealer or service center.

Scanning is impossible

The MODELING light is on.

The sensor unit is not connected. Switch off the power and check again to make sure the sensor unit is installed.

The computer displays the message "Cannot communicate with present scanner."

The setting for the communication port in [Preferences] for Dr. PICZA3 is incorrect. Refer to page 14, "Step 2: Making the Settings for Dr. PICZA3," and check the setting.

Alternatively, no Windows-based driver for the modeling machine is installed. Refer to the documentation for the modeling machine and install the driver. Installing and setting up only Dr. PICZA3 does not enable operation.

Alternatively, try switching off the power and restarting the computer. Also, try changing the USB cable. Use a USB cable less than 3 meters long, and don't use a USB hub.

The VIEW light is on.

Operation is paused. Press the VIEW button to release the paused state.

The VIEW light is flashing.

The front cover is open. Close the front cover and redo the operation.

The SCANNING and VIEW lights are flashing.

The front cover was opened while scanning was in progress. Operation cannot be continued. Switch the power off, and redo the operation. To open the front cover while scanning is in progress, first press the VIEW button to pause operation.

Other Symptoms

Scanning ended, but the computer then stopped.

Go to Dr. PICZA3's [Settings for Scanning] dialog box and increase the scanning pitch. Alternatively, consider installing more memory. When scanning exceeds the amount of free memory on the computer, the operation of the computer may become very slow.

4-2 Specifications

Scanning-mode Specifications

These are the main specifications of the MDX-40 or TS-30 when the ZSC-1 is installed.

	MDX-40/TS-30 (ZSC-I installed)
Maximum scanning area	305 (X) x 305 (Y) x 60 (Z) mm (12 (X) x 12 (Y) x 2-5/16 (Z) in.)
Distance from probe tip to table	Maximum 92.4 mm (3-5/8 in)
Table load capacity	Maximum 4 kg (8.8 lb)
Sensor	Type: Roland Active Piezo Sensor (RAPS) Effective probe length: 60 mm (2-5/16 in.) Tip bulb radius: 0.08 mm (0.00315 in.)
Scanning method	Contacting, mesh-point height-sensing
Operating speed	X/Y axes: 15 to 30 mm/sec. (0.6 to 1.1 in./sec.) Z axis: 1 to 30 mm/sec. (0.04 to 1.1 in./sec.)

